

### Multi Function Versatility for Studio Application




- Local remote control unit for GY-HM790/750 camera and RM-HP790 camera control unit
- Cable Length:5m (fixed cable)

## Specifications


Works with the following products	GY-HM790, GY-HM750, RM-HP790	
Functions	Bars	ON/OFF
	Shutter	Normal, 1/100(120), 1/250, 1/500, 1/1000, 1/2000, EEI
	Gain	0dB, 3dB, 6dB, 9dB, 12dB, 18dB, ALC
	Gamma	Level control
	Detail	Level control
	Knee	Auto, Knee point control
	White balance	Manual, Preset, FAW, AW A, AW B
	White control	Auto White, B level control, R level control
	Iris	Auto Iris level, Full
	Tally	Program, Preview, Call
	Master black	Level control
	Operation lock	Full, OFF
	General	Power requirements
Power consumption		1.8W
Operating temperature		0°C to 40°C (32°F to 104°F)
Operating humidity		10% to 90% (No condensation)
Dimensions		105(W) x 57(H) x 177(D) mm (4-1/8" x 2-1/4" x 6-31/32")
Weight		1.2 kg (2.65lb)
Safety and Environmental Compliance		RoHS, MET, CE, FCC, VCCI

## System Configuration

### ■ Camera connection

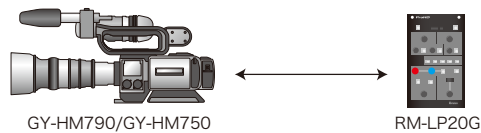

### ■ CCU connection

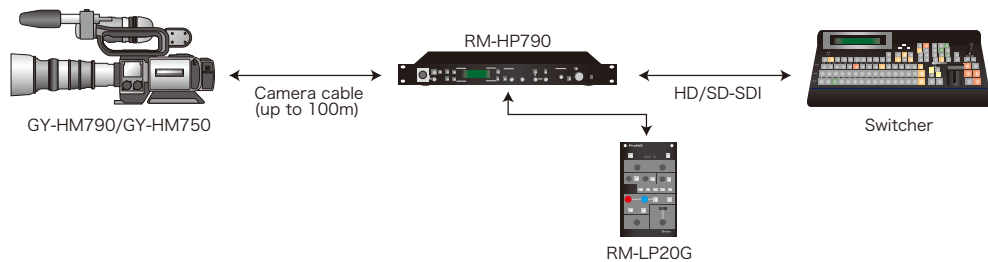

## Dimensions

### ■ Control panel



### ■ Rear panel



**Venetex**  
Venetex Corporation

8-3-9, Shin-machi, Ome-shi, Tokyo 198-0024  
TEL. +81-428-30-0611 FAX. +81-428-30-0612

<http://www.venetex.jp/english/>

\*GY-HM790/750 and RM-HP790 is a product of JVC KENWOOD Corporation.  
\*Specifications as of November, 2012. Features and specifications subject to change without notice.  
\*Actual color of the device may be different from the image.